

AD-A091 315

CALIFORNIA INST OF TECH PASADENA DIV OF ENGINEERING--ETC F/G 20/11
A NOTE ON THE ENERGY RELEASE RATE IN QUASI-STATIC ELASTIC CRACK--ETC(U)
AUG 80 J K KNOWLES N00014-75-C-0196

UNCLASSIFIED

TR-46

NL

END

DATE

FILED

DTIC

AD A091315

LEVEL IV

12

DISTRIBUTION STATEMENT 1
Approved for public release
Distribution Unlimited

FILE COPY

80 10 14 215

Office of Naval Research

Contract N000-14-75-C-0196

12

DTIC
ELECTED
NOV 3 1980

6
A note on the energy release rate in
quasi-static elastic crack propagation,

9 Technical Report No. 46

by

10 James K. Knowles

12 261

11 AUG 28

13 N00014-75-C-0196

DISTRIBUTION STATEMENT A
Approved for public release;
Distribution Unlimited

14 TR-46

Division of Engineering and Applied Science
California Institute of Technology
Pasadena, California 91125

August, 1980

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A	

072585

sl

A note on the energy release rate in
quasi-static elastic crack propagation¹

by


James K. Knowles

Division of Engineering and Applied Science
California Institute of Technology
Pasadena, California 91125

Summary

This paper considers analytical issues associated with the notion of the energy release rate in quasi-static elastic crack propagation.

1. Introduction

When a crack in a deformed elastic solid lengthens, the new free surface created requires energy for its formation. If the crack propagation process is slow enough to be treated as a quasi-static², continuum mechanical models permit the calculation of the rate at which energy is made available for the generation of new free surface in terms of the solution of the governing equilibrium problem corresponding to the deformation of the cracked solid under given loads. 

The essential physical ideas involved in this calculation, as well as the resulting formula, have been known for some time. One may refer, for example, to the work of Atkinson and Eshelby [1], Budiansky and Rice [2], Eshelby [3,4], Rice [5] and Sanders [6]. To make clear the most appropriate underlying mathematical assumptions, however, seems to be more troublesome. Gurtin [7] has recently undertaken to give a precise analysis in such a way as to be valid for two-dimensional problems in nonlinear as well as linear elasticity. His arguments, however, rely on a

¹The results communicated in this paper were obtained in the course of an investigation supported in part by Contract N00014-C-0196 with the Office of Naval Research in Washington, D.C.

²That is, if inertia effects can be neglected.

relatively large number of assumptions, some of which pertain to properties of the solution to the relevant boundary value problem which—ideally, at least—should be deduced, rather than assumed.

In the present note, we consider the simplest possible case of quasi-static elastic crack propagation in order to illustrate and clarify the purely analytical issues involved. We treat the crack problem in anti-plane shear¹ according to the linearized theory of elasticity. The argument given here is entirely different from, and involves substantially fewer assumptions than, that given in [7].

2. The crack problem

We consider a homogeneous, isotropic elastic cylinder in an equilibrium state of anti-plane shear. The outer boundary of a cross-section of the cylinder is a piecewise smooth simple closed curve C , while the inner boundary consists of a line segment of length l (the crack). With cartesian coordinates chosen as in Figure 1, the crack is described by $x_2 = 0$, $0 \leq x_1 \leq l$. We denote by $R(l)$ the region consisting of points on or inside C which do not lie on the crack.

According to the linearized theory of elasticity, the out-of-plane displacement $u = u(x_1, x_2)$ of particles in the cross-section of the cylinder is a harmonic function:

$$\Delta u \equiv u_{,11} + u_{,22} = 0 \quad \text{on } R(l). \quad (2.1)$$

Here a comma followed by a subscript indicates partial differentiation with respect to the corresponding cartesian coordinate. On the outer boundary,

¹ Anti-plane shear refers to the class of deformations of a cylinder in which the displacement vector is parallel to the generators of the cylinder and independent of axial position. For a discussion of anti-plane shear (or "Mode III" displacement fields) in the theory of elasticity, see [8].

$$\mu \frac{\partial u}{\partial n} = f(\sigma) \quad \text{on } C. \quad (2.2)$$

where the constant $\mu > 0$ is the shear modulus of the elastic material, f represents the given traction on C , and σ is arc length, measured positive counterclockwise. The derivative in (2.2) is in the direction of the unit outward normal vector \underline{n} on C . The faces of the crack are to be traction-free, so that

$$u_{,2} = 0 \quad \text{at } x_2 = 0 \pm, \quad 0 < x_1 < l. \quad (2.3)$$

Further,

$$u \text{ is bounded on } \mathcal{R}(l). \quad (2.4)$$

In the model of quasi-static crack propagation envisaged here, the crack lengthens in time by propagating to the right only; l is taken to be a strictly increasing function of the time. Without loss of generality, we may then in fact identify l with the time.

We assume the existence of a solution $u = u(\underline{x}; l) = u(x_1, x_2; l)$ to the problem (2.1)-(2.4) which is defined and three times continuously differentiable with respect to (\underline{x}, l) on the three-dimensional region characterized by $\underline{x} \in \mathcal{R}(l)$, $0 < l \leq l_0$, for some fixed, positive l_0 such that the point $(l_0, 0)$ lies inside C . It is further assumed that u and all of its derivatives of order up to and including three possess limits as a point $(x_1, 0)$ on the crack is approached from above, provided $0 < x_1 < l$. These limits are assumed to be continuous functions of (x_1, l) for $0 < x_1 < l$, $0 < l \leq l_0$. Finally, we make analogous assumptions for the corresponding limits as the crack is approached from below.

Except for cases corresponding to very special choices of the loading f , ∇u is unbounded at both crack-tips.

We shall first prove that the energy in $R(l)$ associated with u , defined by

$$E(l) = \int_{R(l)} \frac{\mu}{2} |\nabla u|^2 dA, \quad 0 < l \leq l_0 \quad (2.5)$$

is finite for each l , and satisfies

$$2E(l) = \int_C f(\sigma) u(\underline{x}; l) d\sigma, \quad 0 < l \leq l_0 \quad (2.6)$$

It follows immediately from (2.6) that there is at most one solution of the prescribed smoothness to the boundary value problem (2.1), (2.4), apart from an arbitrary additive constant. The boundedness condition (2.4) of course plays a central role in the argument leading to (2.6) and the resulting uniqueness.

Our objective is to study the so-called "energy release rate" $\mathcal{E}(l)$ defined by

$$\mathcal{E}(l) = \int_C f(\sigma) \dot{u}(\underline{x}; l) d\sigma - E(l), \quad 0 < l \leq l_0. \quad (2.7)$$

where the dot indicates differentiation with respect to l . In particular

$$\dot{u}(\underline{x}; l) = \frac{\partial u}{\partial l}(\underline{x}; l). \quad (2.8)$$

$\mathcal{E}(l)$ represents the excess of the power supplied by the external traction over the rate of increase of stored energy, and thus may be interpreted as the rate at which energy is made available for the formation of new free surface during the process of crack propagation. Using only the assumptions stated above¹, we shall prove that

¹In particular, we make no assumptions about \dot{u} beyond those stated in the smoothness hypotheses described above.

$$\mathcal{E}(l) = \lim_{r \rightarrow 0} \int_{\Gamma_r} \left(\frac{\mu}{2} |\nabla u|^2 n_1 - \mu \frac{\partial u}{\partial n} u_{,1} \right) ds, \quad (2.9)$$

where Γ_r is a circle of radius r centered at the moving crack-tip $x_1 = l$, $x_2 = 0$, s is arc length on Γ_r (increasing counter-clockwise), and \underline{n} is the unit normal vector on Γ_r which points away from the crack-tip; n_1 is the x_1 -component of \underline{n} . Thus $\mathcal{E}(l)$ depends only on the local behavior of ∇u near the moving crack-tip (and not directly on \dot{u}). We shall also prove that $\mathcal{E}(l) \geq 0$.

In order to establish these results, we need some estimates pertaining to the behavior of u and \dot{u} near the crack-tips. In this connection it is necessary to observe first that \dot{u} satisfies

$$\Delta \dot{u} = 0 \quad \text{on } \mathcal{R}(l), \quad (2.10)$$

$$\frac{\partial \dot{u}}{\partial n} = 0 \quad \text{on } C, \quad (2.11)$$

$$\dot{u}_{,2} = 0 \quad \text{at } x_2 = 0 \pm, \quad 0 < x_1 < l. \quad (2.12)$$

These follow from (2.1)-(2.3) by differentiation with respect to l , provided use is made of the fact that the traction f is independent of l . If \dot{u} were bounded at both crack-tips, and therefore on $\mathcal{R}(l)$, the uniqueness result alluded to above would imply that $\dot{u} \equiv \text{constant}$ on $\mathcal{R}(l)$. It will turn out, however, that \dot{u} is in general unbounded near the moving crack-tip.

We now consider the local behavior of harmonic functions near a crack tip.

3. Crack-tip estimates.

Let \mathcal{D} be the plane slit disc described in polar coordinates by

$$\mathcal{D} = \{(r, \theta) | 0 < r \leq a, -\pi < \theta < \pi\} . \quad (3.1)$$

Further, let Γ_r , $0 < r \leq a$, at present be the circle of radius a centered at the origin, and denote by \mathcal{D}_r , $0 < r \leq a$, and \mathcal{B}_r , $0 < r < a$, the sets of those points in \mathcal{D} which lie respectively inside and outside Γ_r .

Let $\varphi = \varphi(r, \theta)$ be a function defined on \mathcal{D} with the following properties:

- A. $\varphi \in C^2(\mathcal{D})$, and φ and its derivatives¹ φ_r and φ_θ possess limits as $\theta \rightarrow \pm\pi$, $0 < r \leq a$; these limits are continuous functions of r , $0 < r \leq a$.
- B. φ is mean-square bounded on \mathcal{D} ; i.e., there is a constant $m \geq 0$ such that

$$\frac{1}{2\pi r} \int_{\Gamma_r} \varphi^2 ds \leq m^2, \quad 0 < r \leq a, \quad . \quad (3.2)$$

$$C. \quad \varphi_{rr} + \frac{1}{r} \varphi_r + \frac{1}{r^2} \varphi_{\theta\theta} = 0 \quad \text{on } \mathcal{D} . \quad (3.3)$$

$$D. \quad \varphi_\theta(r, \pm\pi) = 0, \quad 0 < r \leq a . \quad (3.4)$$

We note that φ has property B if φ is bounded on \mathcal{D} .

The principal conclusions concerning functions with properties A-D relate to the energy distribution associated with φ and form the basis of the analysis to follow. The energy $E(r)$ in \mathcal{D}_r associated with φ , defined by

¹Derivatives with respect to r or θ are indicated by subscripts without commas.

$$E(r) = \int_{B_r} \frac{\mu}{2} |\nabla \varphi|^2 dA, \quad 0 < r \leq a, \quad (3.5)$$

is finite and satisfies

$$E(r) = \int_{\Gamma_r} \frac{\mu}{2} \varphi_r \varphi ds \geq 0, \quad 0 < r \leq a. \quad (3.6)$$

Moreover,

$$E(r) \rightarrow 0 \quad \text{as } r \rightarrow 0 \quad (3.7)$$

To prove this proposition¹, we begin by setting

$$F(r) = \int_{B_r} \frac{\mu}{2} |\nabla \varphi|^2 dA, \quad 0 < r < a \quad (3.8)$$

A standard application of the divergence theorem, together with (3.3) and (3.4), leads to

$$F(r) = g(a) - g(r), \quad (3.9)$$

where

$$g(r) = \int_{\Gamma_r} \frac{\mu}{2} \varphi_r \varphi ds, \quad 0 < r \leq a \quad (3.10)$$

Moreover, from (3.9), (3.8),

$$g'(r) = -F'(r) = \int_{\Gamma_r} \frac{\mu}{2} |\nabla \varphi|^2 ds \geq 0, \quad (3.11)$$

¹The argument that follows is essentially the same as that used in a more general setting in [9].

so that $g(r)$ is monotone nondecreasing. It follows that $-\infty \leq g(0+) < \infty$.

From (3.10), (3.11) and Schwarz's inequality, one obtains

$$g^2(r) \leq \frac{\mu^2}{4} \int_r^2 \varphi_r^2 ds \int_r^2 \varphi^2 ds \leq \frac{\mu}{2} g'(r) \int_r^2 \varphi^2 ds. \quad (3.12)$$

By (3.2) (property B),

$$g^2(r) \leq \pi \mu m^2 r g'(r), \quad 0 < r \leq a. \quad (3.13)$$

Suppose first that $g(0+) < 0$. Then for some r_2 , $0 < r_2 < a$, one has $g(r) < 0$ for $0 < r \leq r_2$. Integrate (3.13) from r_1 to r_2 , where $0 < r_1 < r_2$, obtaining

$$\log \frac{r_2}{r_1} \leq \pi \mu m^2 \left[\frac{1}{g(r_1)} - \frac{1}{g(r_2)} \right] \leq \frac{\pi \mu m^2}{|g(r_2)|}, \quad (3.14)$$

or

$$|g(r_2)| \leq \frac{\pi \mu m^2}{\log r_2 / r_1}. \quad (3.15)$$

Let $r_1 \rightarrow 0$ to get $g(r_2) = 0$, which is a contradiction. Next suppose that $g(0+) > 0$. Then $g(r) > 0$ for $0 < r \leq r_2$ for some r_2 , $0 < r_2 < a$. Integration of (3.13) now gives

$$g(r_1) \leq \frac{\pi \mu m^2}{\log r_2 / r_1}, \quad 0 < r_1 < r_2, \quad (3.16)$$

from which we conclude $g(0+) = 0$, again a contradiction. Thus

$$g(r) \rightarrow 0 \quad \text{as } r \rightarrow 0 \quad (3.17)$$

From (3.17), (3.9), it follows that

$$F(0+) = g(a)$$

is finite. But (see (3.5), (3.8), (3.9)),

$$E(r) = F(0+) - F(r) = g(r), \quad 0 < r \leq a; \quad (3.18)$$

(3.18), (3.10) and (3.17) establish (3.6), (3.7) and the proof is complete.

4. Properties of u, \dot{u} near the crack-tips.

Returning to the original boundary value problem (2.1)-(2.4), we suppose first that $\bar{\ell}$ is a fixed but arbitrary value of ℓ with $0 < \bar{\ell} < \ell_0$. Let a be a constant such that $0 < \bar{\ell} - 2a < \bar{\ell} + 2a < \ell_0$, denote by Λ the ℓ -interval $[\bar{\ell} - a, \bar{\ell} + a]$, and note that the (moving) circle $\Gamma_r = \Gamma_r(\ell)$ of radius a centered at the right crack-tip lies in the interior of the boundary curve C and never encloses the left crack-tip, provided ℓ lies in Λ . In this section we shall consider the solution $u(\underline{x}; \ell)$ and its derivative $\dot{u}(\underline{x}, \ell)$ only for values of ℓ in the interval Λ .

With a as above, let $\Gamma_r = \Gamma_r(\ell)$ $0 < r \leq a$, be the circle of radius r centered at $x_1 = \ell, x_2 = 0$, and let \mathcal{S} stand for the set described by (3.1), where r, θ are now (moving) polar coordinates centered at the right crack-tip. As in the preceding section, \mathcal{S}_r denotes the set of those points in \mathcal{S} which lie inside Γ_r , $0 < r < a$. Define

$$v(r, \theta; \ell) = u(\ell + r \cos \theta, r \sin \theta; \ell), \quad 0 < r \leq a, -\pi \leq \theta \leq \pi, \quad \ell \in \Lambda, \quad (4.1)$$

and note that

$$\dot{v}(r, \theta; l) \equiv \frac{\partial v}{\partial l}(r, \theta; l) = u_{,1} + \dot{u} . \quad (4.2)$$

In view of the assumptions made on u in Section 2, v clearly has properties A-D for each l in Λ ; in particular, by (2.4), there is a constant $m(l)$ such that

$$\frac{1}{2\pi r} \int_{\Gamma_r} v^2(r, \theta; l) ds \leq m^2(l) , \quad 0 < r \leq a , \quad l \in \Lambda . \quad (4.3)^1$$

In view of the proposition in Section 3 concerning functions with properties A-D, it follows from (3.7), (3.5) with $\varphi(r, \theta) = v(r, \theta; l)$ that

$$\int_{\Gamma_r} |\nabla v|^2 dA \rightarrow 0 \quad \text{as } r \rightarrow 0 , \quad l \in \Lambda . \quad (4.4)$$

From (4.2) and the fact that u and \dot{u} are harmonic in \mathcal{E} and have vanishing first normal derivatives on the crack-faces (see (2.1), (2.3), (2.9), (2.11)), it follows that \dot{v} has properties A, C, D, for each l in Λ . We show next that v has property B (see (3.2)) for each such l . To this end, let l and l' belong to Λ , with $l' \neq l$. Define

$$V(r, \theta; l, l') = \frac{v(r, \theta; l) - v(r, \theta; l')}{l - l'} , \quad 0 < r \leq a , \quad -\pi \leq \theta \leq \pi , \quad l, l' \in \Lambda , \quad l' \neq l . \quad (4.5)$$

Clearly V has properties A-D, and hence, choosing $\varphi = V$ in (3.6) and making use of (3.7), one has

$$\int_{\Gamma_r} V^2 ds \geq 0 , \quad 0 < r \leq a , \quad l, l' \in \Lambda , \quad l \neq l' . \quad (4.6)$$

The idea now is to let $l' \rightarrow l$ with r fixed in (4.6). To carry out this limit

¹In fact, $|v| \leq m$ on \mathcal{E} .

process, we first observe from (4.5) that

$$V(r, \theta; \ell, \ell') \rightarrow \dot{v}(r, \theta; \ell) \quad \text{as } \ell' \rightarrow \ell, \quad \text{for each fixed } (r, \theta). \quad (4.7)$$

Moreover, from (4.5), the mean value theorem, and the smoothness properties that v inherits from u through (4.1), it follows that

$$|V(r, \theta; \ell, \ell')| \leq M_1(r), \quad 0 < r \leq a, \quad -\pi \leq \theta \leq \pi, \quad \ell', \ell \in \Lambda, \quad \ell' \neq \ell. \quad (4.8)$$

and

$$|V_r(r, \theta; \ell, \ell')| \leq M_2(r), \quad 0 < r \leq a, \quad -\pi \leq \theta \leq \pi, \quad \ell', \ell \in \Lambda, \quad \ell' \neq \ell. \quad (4.9)$$

where

$$M_1(r) = \max_{\substack{-\pi \leq \theta \leq \pi \\ \lambda \in \Lambda}} |\dot{v}(r, \theta; \lambda)|, \quad M_2(r) = \max_{\substack{-\pi \leq \theta \leq \pi \\ \lambda \in \Lambda}} |\dot{v}_r(r, \theta; \lambda)|, \quad 0 < r \leq a. \quad (4.10)$$

It follows that

$$|VV_r| \leq M_1 M_2 \quad \text{on } \Gamma_r \quad \text{for each } r, \quad 0 < r \leq a, \quad \text{and for all } \ell', \ell \in \Lambda, \quad \ell' \neq \ell. \quad (4.11)$$

Thus the pointwise convergence in (4.7), although not necessarily uniform, is dominated. It follows from a standard theorem¹ that the limit as $\ell' \rightarrow \ell$ may be taken inside the integral in (4.6), yielding

$$\int_{\Gamma_r} \dot{v} \dot{v}_r ds \geq 0, \quad 0 < r \leq a, \quad \ell \in \Lambda. \quad (4.12)$$

Thus

¹See [10], p. 405

$$\frac{d}{dr} \left(\int_{\Gamma_r} \frac{\dot{v}^2}{r} ds \right) \geq 0, \quad 0 < r \leq a, \quad l \in \Lambda, \quad (4.13)$$

so that the integral in (4.13) is a nonnegative, monotone nondecreasing function of r . It follows that this integral is a bounded function of r , $0 < r \leq a$; i.e. there is a constant $n(l) \geq 0$ such that

$$\frac{1}{2\pi r} \int_{\Gamma_r} \dot{v}^2 ds \leq n^2(l), \quad 0 < r \leq a, \quad l \in \Lambda. \quad (4.14)$$

Thus \dot{v} has property B for each l in Λ . The main proposition of Section 3 may now be invoked with $\varphi = \dot{v}$; from (3.6), (3.7) we find that

$$\int_{\partial_r} |\nabla \dot{v}|^2 dA \rightarrow 0 \quad \text{as } r \rightarrow 0, \quad l \in \Lambda. \quad (4.15)$$

We note that (4.3), (4.14) imply

$$\int_{\Gamma_r} v^2 ds = o(r), \quad \int_{\Gamma_r} \dot{v}^2 ds = o(r) \quad \text{as } v \rightarrow 0, \quad l \in \Lambda. \quad (4.16)$$

Finally, we observe that, since the choice of the center \bar{l} of the interval Λ was arbitrary, each of the four limiting results (4.4), (4.15), (4.16) holds for every l in $(0, l_0)$.

It may be remarked that a more refined argument, using more detailed properties of v , can be used to prove that \dot{v} is actually continuous at the moving crack-tip¹, and not merely mean-square bounded as asserted in (4.14).

¹Continuity of the analogous physical quantity in plane strain at the moving crack-tip is assumed in [7].

Since (4.14) is sufficient for our purposes, we omit the proof of the continuity of \dot{v} .

As remarked earlier, ∇u is in general not bounded — or even mean-square bounded — near a crack-tip. According to (4.2) and (4.14), therefore, \dot{u} would in general not be bounded near the moving crack-tip.

Analysis parallel to that given above can be carried out near the left (fixed) crack-tip. One sets

$$w(r, \theta; l) = u(r \cos \theta, r \sin \theta; l), \quad (4.17)$$

where r, θ are now polar coordinates centered at the origin. In contrast to (4.2), we have

$$\dot{w} = \dot{u} \quad (4.18)$$

If Γ_r is a circle of radius r centered at the origin while Δ_r is the interior of Γ_r with the crack deleted, one can again show that

$$\int_{\Gamma_r} w^2 ds = O(r), \quad \int_{\Gamma_r} \dot{w}^2 ds = O(r) \quad \text{as } r \rightarrow 0, \quad 0 < l < l_0, \quad (4.19)^1$$

as well as

$$\int_{\Delta_r} |\nabla w|^2 dA \rightarrow 0, \quad \int_{\Delta_r} |\nabla \dot{w}|^2 dA \rightarrow 0 \quad \text{as } r \rightarrow 0, \quad 0 < l < l_0 \quad (4.20)$$

We omit the details.

¹Again, \dot{w} can be shown to be continuous, and not merely mean-square bounded, at the left crack-tip.

5. Energy release rate.

It is clear from the local considerations of the preceding section that the energy $E(l)$ of (2.5) associated with the boundary value problem (2.1)-(2.4) is finite. In order to study $E(l)$, we let $\Gamma_r^{(1)}$, $\Gamma_r^{(2)}$ be circles of radius r , $0 < r \leq a$, centered at the left and right crack-tips, respectively¹. Let $R_r(l)$ be the set of those points which lie in $R(l)$ but outside $\Gamma_r^{(1)} + \Gamma_r^{(2)}$, $0 < r \leq a$. An application of the divergence theorem to the integral of $(\mu/2)|\nabla u|^2$ over $R_r(l)$, accounting for the presence of the crack and making use of (2.1), (2.3), followed by the limit $r \rightarrow 0$, leads easily to the conclusion that

$$E(l) = \frac{1}{2} \int_C f(\sigma) u(\underline{x}; l) d\sigma, \quad 0 < l \leq l_0, \quad (5.1)$$

as claimed in (2.6).

Since the given traction f on C is independent of l , it follows immediately from (5.1) that

$$2\dot{E}(l) = \int_C f(\sigma) \dot{u}(\underline{x}, l) d\sigma. \quad (5.2)$$

An alternative expression for $\dot{E}(l)$ may be obtained from (5.2) by proceeding as follows. From (5.2), (2.2),

¹Here a is assumed small enough to keep $\Gamma_a^{(1)}$ and $\Gamma_a^{(2)}$ inside C and to assure that each circle encloses only one crack tip.

$$\begin{aligned}
 2\dot{E}(\ell) &= \int_C \mu \frac{\partial u}{\partial n} \dot{u} d\sigma = \int_{S_r} \mu \frac{\partial u}{\partial n} \dot{u} ds \\
 &\quad - \int_{\Gamma_r^{(1)}} \mu \frac{\partial u}{\partial n} \dot{u} ds \\
 &\quad - \int_{\Gamma_r^{(2)}} \mu \frac{\partial u}{\partial n} \dot{u} ds , \tag{5.3}
 \end{aligned}$$

where $S_r = C + \Gamma_r^{(1)} + \Gamma_r^{(2)}$, and \underline{n} is the unit normal on S_r , taken outward with respect to $R_r(\ell)$. The arc lengths and integrals over $\Gamma_r^{(1)}$, $\Gamma_r^{(2)}$ are taken counterclockwise. The divergence theorem, together with the facts that u and \dot{u} are harmonic and satisfy the free surface conditions (2.3) and (2.12) on the crack faces, permits one to write

$$\int_{S_r} \mu \frac{\partial u}{\partial n} \dot{u} ds = \int_{S_r} \mu \frac{\partial \dot{u}}{\partial n} u ds . \tag{5.4}$$

Making use of (2.11) in (5.4), we find that

$$\int_{S_r} \mu \frac{\partial u}{\partial n} \dot{u} ds = \int_{\Gamma_r^{(1)}} \mu \frac{\partial \dot{u}}{\partial n} u ds + \int_{\Gamma_r^{(2)}} \mu \frac{\partial \dot{u}}{\partial n} u ds , \tag{5.5}$$

so that (5.3) may be written in the form

$$2\dot{E}(\ell) = I_1(r; \ell) + I_2(r, \ell) \tag{5.6}^1$$

where

¹The representation (5.6), (5.7) for $E(\ell)$ is the analog in anti-plane shear of Sanders' I-integral in plane strain or plane stress (see Eq.(4) of [6]).

$$I_{\alpha}(r;l) = \int_{\Gamma_r^{(\alpha)}} \mu \left(\frac{\partial \dot{u}}{\partial n} u - \frac{\partial u}{\partial n} \dot{u} \right) ds, \quad \alpha=1,2 \quad (5.7)$$

Equations (5.6), (5.7) show that $\dot{E}(l)$ depends only on the behavior of u and \dot{u} near the crack-tips.

Consider first the integral I_2 : from (4.1) and (4.2),

$$I_2 = 2J + H_2, \quad (5.8)$$

where

$$J = J(r;l) = \int_{\Gamma_r^{(2)}} \frac{\mu}{2} \left[\frac{\partial u}{\partial n} u_{,1} - \frac{\partial}{\partial n} (u_{,1}) u \right] ds, \quad (5.9)$$

$$H_2 = H_2(r;l) = \int_{\Gamma_r^{(2)}} \mu (v_r \dot{v} - \dot{v}_r v) ds. \quad (5.10)$$

A direct calculation which makes use of the facts that v, \dot{v} are harmonic and $v_{\theta}, \dot{v}_{\theta}$ vanish at $\theta = \pm\pi$ reveals that $\partial H_2 / \partial r = 0$, so that the integral in (5.10) is independent of r : $H_2(r;l) = H_2(l)$. If one now integrates (5.10) with respect to r over the interval $0 < r < r_1$, $r_1 < a$, one finds.

$$r_1 H_2(l) = \int_{\mathcal{E}_{r_1}} \mu (v_r \dot{v} - \dot{v}_r v) dA. \quad (5.11)$$

The Schwarz inequality now gives

$$r_1^2 H_2^2(l) \leq 2\mu^2 \left\{ \int_{\mathcal{E}_{r_1}} v_r^2 dA \int_{\mathcal{E}_{r_1}} \dot{v}^2 dA + \int_{\mathcal{E}_{r_1}} \dot{v}_r^2 dA \int_{\mathcal{E}_{r_1}} v^2 dA \right\}. \quad (5.12)^1$$

¹The finiteness of the integrals on the right in (5.12) assures the existence of the integral in (5.11).

From (4.14) and (4.3) one finds that

$$\int_{\mathcal{S}_{r_1}} v^2 dA \leq \pi m^2(\ell) r_1^2, \quad \int_{\mathcal{S}_{r_1}} \dot{v}^2 dA \leq \pi n^2(\ell) r_1^2, \quad (5.13)$$

so that (5.12) yields

$$H_2^2(\ell) \leq 2\pi\mu^2 \left[m^2(\ell) \int_{\mathcal{S}_{r_1}} |\nabla \dot{v}|^2 dA + n^2(\ell) \int_{\mathcal{S}_{r_1}} |\nabla v|^2 dA \right]. \quad (5.14)$$

Letting $r_1 \rightarrow 0$ in (5.14) and using (4.15), (4.4), we find

$$H_2(\ell) = 0, \quad (5.15)$$

so that, from (5.8),

$$\lim_{r \rightarrow 0} I_2(r; \ell) = \lim_{r \rightarrow 0} J(r; \ell) \quad (5.16)$$

As to the integral $I_1(r, \ell)$, one shows by a similar argument based on (4.18), (4.19) and (4.20) that

$$\lim_{r \rightarrow 0} I_1(r; \ell) = 0 \quad (5.17)$$

Letting $r \rightarrow 0$ in (5.6) and using (5.16), (5.17), and (5.8), we obtain

$$\dot{E}(\ell) = \lim_{r \rightarrow 0} J(r; \ell) \quad (5.18)$$

where J is given by (5.9). Note that J does not involve \dot{u} and depends only on the behavior of u near the moving crack-tip.

A more convenient representation for J can be found as follows. Since by (4.1),

$$u_{,1} = v_r \cos \theta - \frac{1}{r} v_\theta \sin \theta, \quad (5.19)$$

one may write (5.9) as

$$J = -\frac{\mu}{2} \int_{\Gamma_r^{(2)}} \left[v_r (v_r \cos \theta - \frac{1}{r} v_\theta \sin \theta) - v \frac{\partial}{\partial r} (v_r \cos \theta - \frac{1}{r} v_\theta \sin \theta) \right] ds \quad (5.20)$$

The fact that v is harmonic can be used to eliminate v_{rr} from (5.20); integrations by parts and the boundary conditions $v_\theta = 0$ at $\theta = \pm\pi$ then give

$$J = \int_{\Gamma_r^{(2)}} \mu \left(\frac{1}{2} |\nabla u|^2 n_1 - u_{,1} \frac{\partial u}{\partial n} \right) ds. \quad (5.21)$$

Here n is the unit normal on $\Gamma_r^{(2)}$ pointing away from the crack-tip, and $n_1 = \cos \theta$ is its x_1 -component. The integral in (5.21) is the usual J-integral of fracture mechanics discovered by Eshelby [4] and independently by Rice [11]. As these authors have shown, and as is easily verified, J is independent of r . In fact, the integral

$$J = J(\ell) = \int_{\Gamma} \mu \left(\frac{1}{2} |\nabla u|^2 n_1 - u_{,1} \frac{\partial u}{\partial n} \right) ds, \quad (5.22)$$

is independent of the path Γ , as long as Γ is a curve in $\mathcal{R}(\ell)$ which begins and ends on the faces of the crack and surrounds the right crack-tip but not the left one. Thus (5.18) may be replaced by

$$\dot{E}(\ell) = J(\ell), \quad (5.23)$$

with $J(\ell)$ given by (5.22). In view of (5.2), (5.23) the energy release rate of (2.7) is given by

$$\mathcal{E}(l) = \dot{E}(l) = J(l) \quad (5.24)$$

Thus the power delivered by the external load is divided equally between the tasks of increasing the stored energy and making energy available for crack propagation.

Equations (5.24), (5.22) show that $\mathcal{E}(l)$ (and $\dot{E}(l)$) depend only on the local behavior of ∇u near the moving crack-tip.

In order to show that $\mathcal{E}(l) \geq 0$, it is convenient to introduce a function $\phi(l, l')$ as follows: for $0 < l' \leq l < l_0$, set

$$\phi(l, l') = \int_{R(l)} \frac{1}{2} |\nabla u(\underline{x}, l')|^2 dA - \int_C f(\sigma) u(\underline{x}, l') d\sigma, \quad (5.25)$$

and let

$$P(l) = \phi(l, l); \quad (5.26)$$

$P(l)$ is called the potential energy¹ in $R(l)$ associated with u . Moreover, (5.1), (2.5) give

$$P(l) = -E(l), \quad (5.27)$$

so that

$$\dot{P}(l) = -\dot{E}(l). \quad (5.28)$$

Let $\Gamma_r^{(1)}$, $\Gamma_r^{(2)}$ be circles of radius r centered at $(0,0)$ and $(l,0)$ as before, and let $\Gamma_r^{(3)}$ be a circle of radius r centered at $(l',0)$,

¹It follows from properties of $u(\underline{x}, l)$ already established that $\phi(l, l')$, $P(l)$ are finite

where $0 < l' < l$. Let $R_r(l, l')$ be the set of those points in $R(l)$ which lie outside $\Gamma_r^{(1)} + \Gamma_r^{(2)} + \Gamma_r^{(3)}$. Set

$$\phi_r(l, l') = \int_{R_r(l, l')} \frac{\mu}{2} |\nabla(\underline{x}, l')|^2 dA - \int_C f(\sigma) u(\underline{x}, l') d\sigma, \quad 0 < l' < l < l_0. \quad (5.29)$$

The divergence theorem and (2.1) - (2.3) make it possible to show that

$$\begin{aligned} \phi_r(l, l') - \phi_r(l, l) &= \int_{R_r(l, l')} \frac{\mu}{2} |\nabla u(\underline{x}, l) - \nabla u(\underline{x}, l')|^2 dA \\ &\quad + Q_r(l, l') \geq Q_r(l, l'), \end{aligned} \quad (5.30)$$

where

$$Q_r(l, l') = \int_{\Gamma_r^{(1)} + \Gamma_r^{(2)} + \Gamma_r^{(3)}} [u(\underline{x}, l') - u(\underline{x}, l)] \frac{\partial u}{\partial n}(\underline{x}, l) ds. \quad (5.31)$$

By using the crack-tip estimates of Section 4, one can show that $Q_r(l, l') \rightarrow 0$ as $r \rightarrow 0$. Letting $r \rightarrow 0$ in (5.30) and noting $\phi_r(l, l') \rightarrow \phi(l, l')$ as $r \rightarrow 0$, we obtain

$$\phi(l, l') \geq \phi(l, l) = P(l), \quad 0 < l' < l. \quad (5.32)$$

But

$$\int_{R(l)} \frac{1}{2} |\nabla u(\underline{x}, l')|^2 dA = \int_{R(l')} \frac{1}{2} |\nabla u(\underline{x}, l')|^2 dA, \quad (5.33)$$

so from (5.25), (5.26), (5.33),

$$\phi(l, l') = \phi(l', l') = P(l'), \quad 0 < l' < l. \quad (5.34)$$

Combining (5.34), (5.32) gives

$$P(\ell') \geq P(\ell) \quad 0 < \ell' < \ell, \quad (5.35)$$

so that $P(\ell)$ is nonincreasing with ℓ . Thus from (5.28), $\dot{E}(\ell) \geq 0$, and from (5.24), $\mathcal{E}(\ell) \geq 0$.

The inequality (5.35) may be viewed as an instance of the minimum principle associated with the boundary value problem (2.1)-(2.4) (the principle of minimum potential energy).

Acknowledgment.

The author acknowledges many helpful discussions with Eli Sternberg.

REFERENCES

- [1] C. Atkinson and J.D. Eshelby, The flow of energy into the tip of a moving crack, International Journal of Fracture Mechanics, 4 (1968), 3-8.
- [2] B. Budiansky and J.R. Rice, Conservation laws and energy release rates, Journal of Applied Mechanics, 40 (1973), 201-203.
- [3] J.D. Eshelby, Energy relations and the energy-momentum tensor in continuum mechanics, Inelastic Behavior of Solids (ed. M.F. Kanninen, et al.), McGraw-Hill, New York, 1956.
- [4] J.D. Eshelby, The continuum theory of lattice defects, Solid State Physics (ed. F. Seitz and D. Turnbull), vol. 3, Academic Press, New York, 1956.
- [5] J.R. Rice, Mathematical analysis in the mechanics of fracture, Fracture, an Advanced Treatise (ed. H. Liebowitz), vol. 2, Academic Press, New York, 1968.
- [6] J.L. Sanders, On the Griffith-Irwin Fracture Theory, Journal of Applied Mechanics, 27 (1960), 352-353.
- [7] M.E. Gurtin, On the energy release rate in quasi-static elastic crack propagation, Journal of Elasticity, 9 (1979), 187-195.
- [8] I.N. Sneddon and M. Lowengrub, Crack problems in the classical Theory of Elasticity, Wiley, New York, 1969.
- [9] J.K. Knowles and T.A. Pucik, Uniqueness for plane crack problems in linear elastostatics, Journal of Elasticity, 3 (1973), 155-160.
- [10] T.M. Apostol, Mathematical Analysis, Addison-Wesley, Reading, Mass., 1957.
- [11] J.R. Rice, A path-independent integral and the approximate analysis of strain concentration by notches and cracks, Journal of Applied Mechanics, 35 (1968), 379.

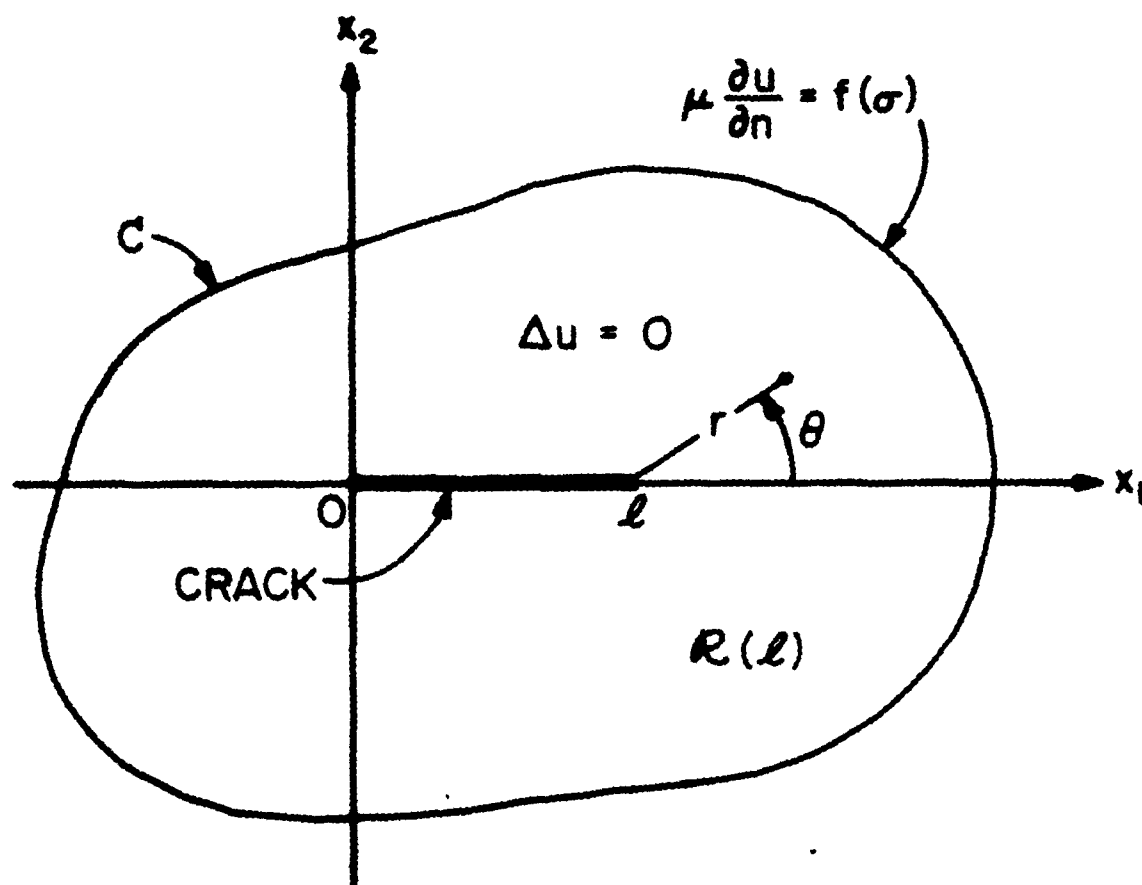


Figure 1. CROSS-SECTION OF CRACKED CYLINDER

unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER 46	2. GOVT ACCESSION NO. AD-A092	3. RECIPIENT'S CATALOG NUMBER 345
4. TITLE (and Subtitle) A note on the energy release rate in quasi-static elastic crack propagation		5. TYPE OF REPORT & PERIOD COVERED Research
7. AUTHOR(s) J.R. Knowles		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS California Institute of Technology Pasadena, California 91125		8. CONTRACT OR GRANT NUMBER(s) N00014-75-C-0196
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research Washington, D.C.		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE August 1980
		13. NUMBER OF PAGES 24
		15. SECURITY CLASS. (of this report) unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) cracks, energy release rate, J-integral		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This paper considers analytical issues associated with the notion of the energy release rate in quasi-static elastic crack propagation.		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

unclassified

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)